


# TDAA Tire Jump

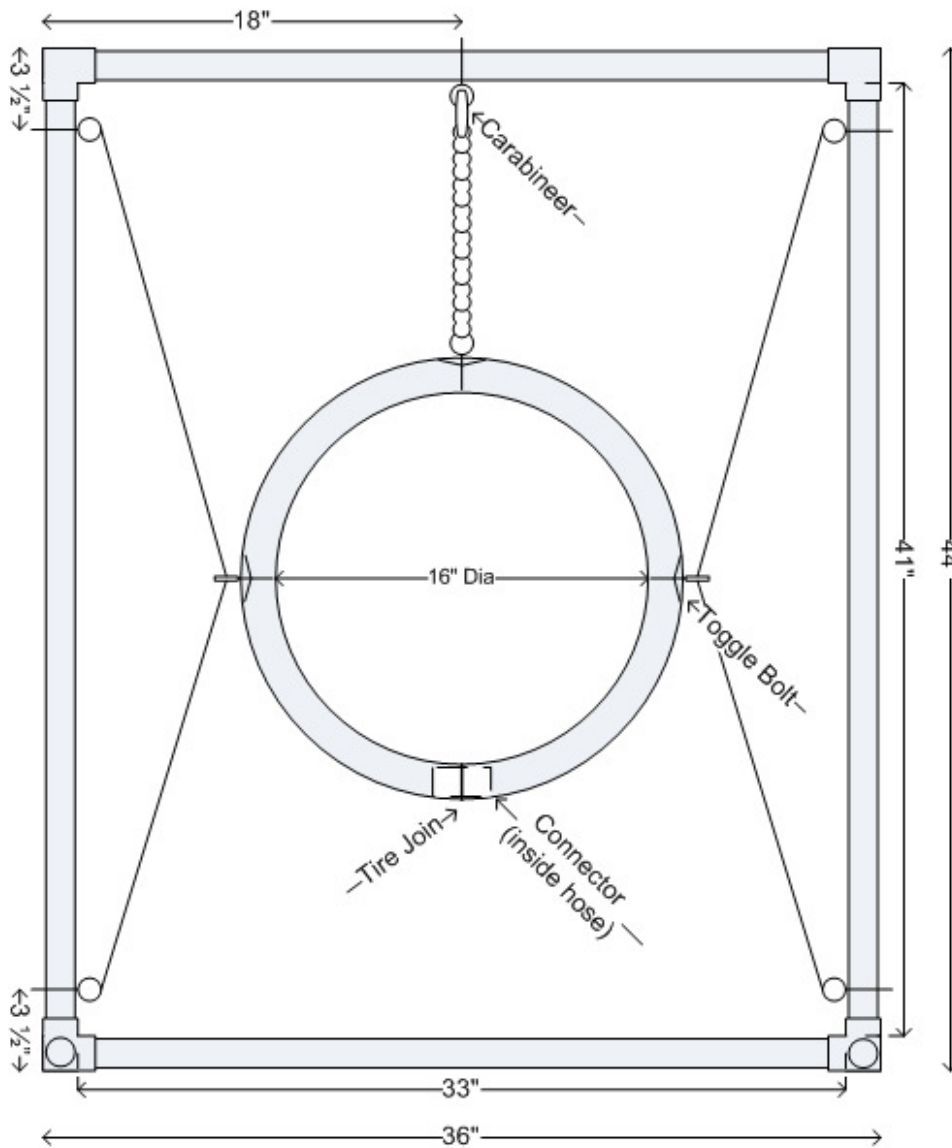

Frame is PVC pipe 1" Sch. 40.


All Fittings are Furniture Grade  
(can be ordered from [www.usplastic.com/](http://www.usplastic.com/) )

- (2) 4 Way Elbow
- (2) Single Elbow
- (4) End Caps

- (5) Eye Bolts 3" long with nuts
- (10) 1/2" Washers
- (2) 40" bungee cord
- Carabineer Clip 2" long
- 24" Plastic Chain

Open Eye Bolts to thread bungee and hook chain, then squeeze close

Side

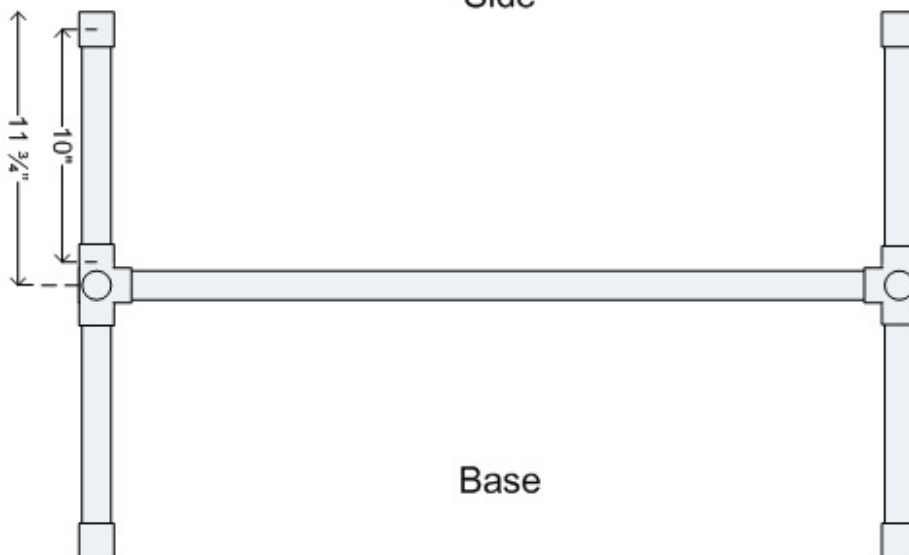

Base

Tire is 1 1/2" white Spa Flex Hose II, 57" long from Lowes / Home Depot

- (3) 2 1/2" metal toggle eye bolts.

Drill hole in Hose and insert toggle bolts

Attach ends of hose with 1 1/2" PVC pipe, 2 1/2" in length. Cut connector PVC pipe length ways twice (2 slices) on one side, to decrease the connector diameter so it will slide into ends of Spa Flex Hose.

Or

Order flexible pipe connector (coupler) from [www.usplastic.com/](http://www.usplastic.com/)

Use Plastic Glue NOT PVC glue to hold tire ends together



NOTE: Tire Photographs are slight variation on Specification